



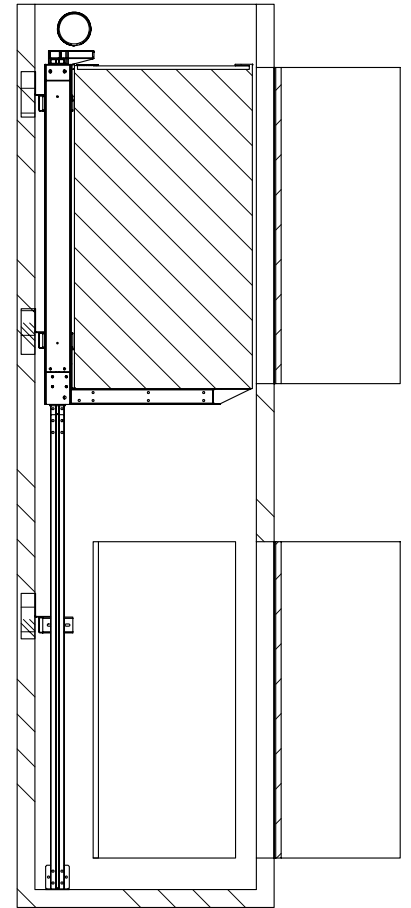
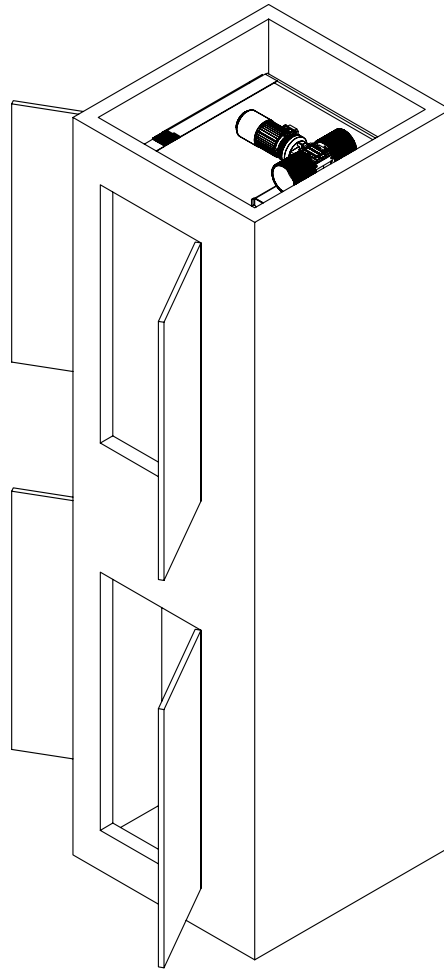
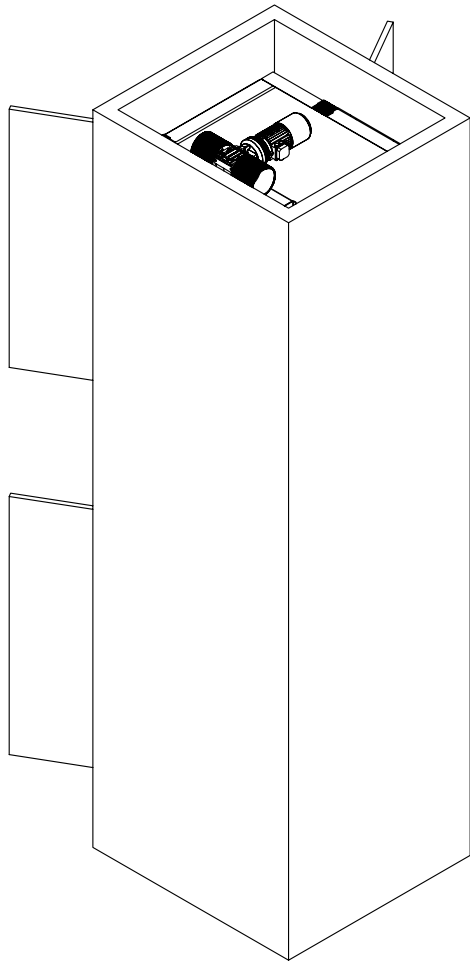
PROVIDE WALL CONSTRUCTION SUITABLE FOR ATTACHMENT OF RAIL BRACKETS AT SHOWN ELEVATION. MUST BE CAPABLE OF 300LB PULLOUT LOADING WITH MAX DEFLECTION OF 1/8".

BRACKET LOCATIONS MAY VARY ACORDING TO TRAVEL

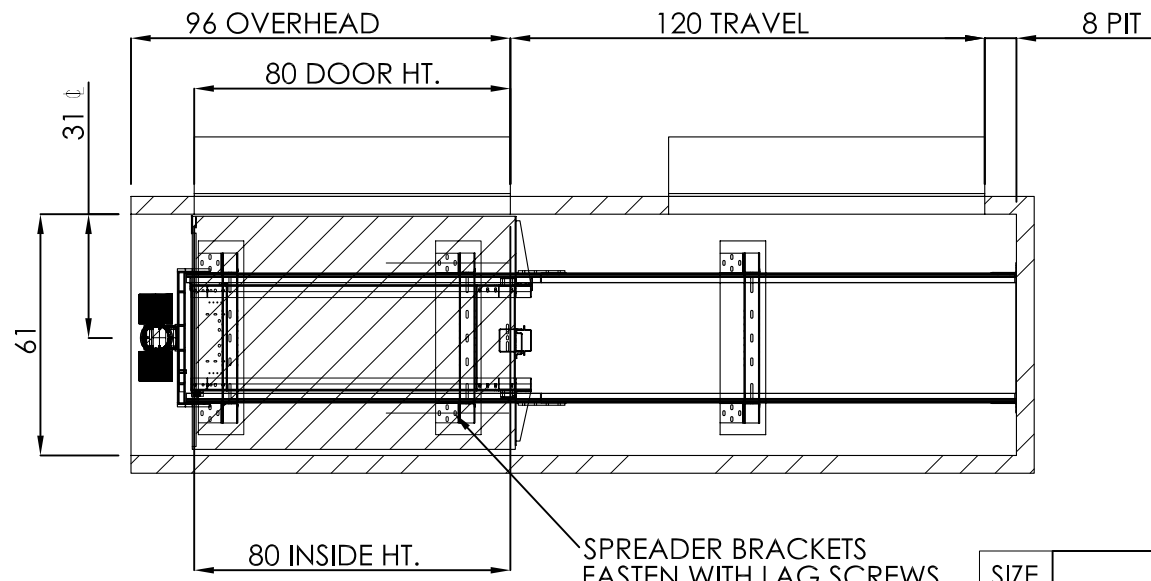

SPREADER BRACKETS FASTEN WITH LAG SCREWS 2 PLACES PER SIDE BRACKET

SIZE	 <a href="http://www.elevators.com">www.elevators.com</a> P: 888-695-4387 E: info@elevators.com
<b>A</b>	
PART NO.	<b>40 X 54, TYPE 3</b>
SHEET 2 OF 3	
DESCRIPTION: SWING DOORS, OVERHEAD DRUM	



SIZE

**A**

**Nationwide Lifts**  
www.elevators.com

P: 888-695-4387

E: info@elevators.com

PART NO.

**40 X 54, TYPE 3**

SHEET 3 OF 3

DESCRIPTION:

SWING DOORS, OVERHEAD DRUM

5

↑

4

3

2

1