



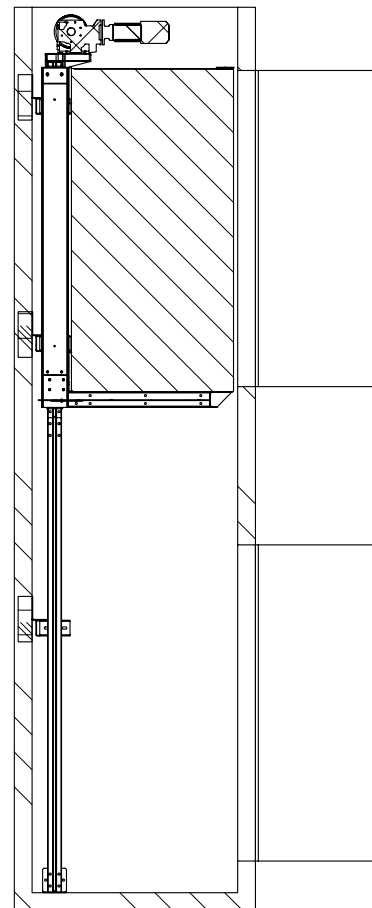
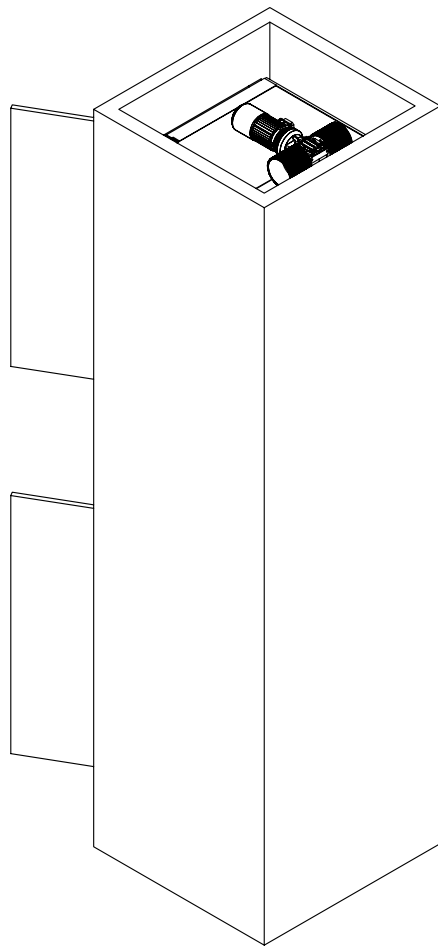
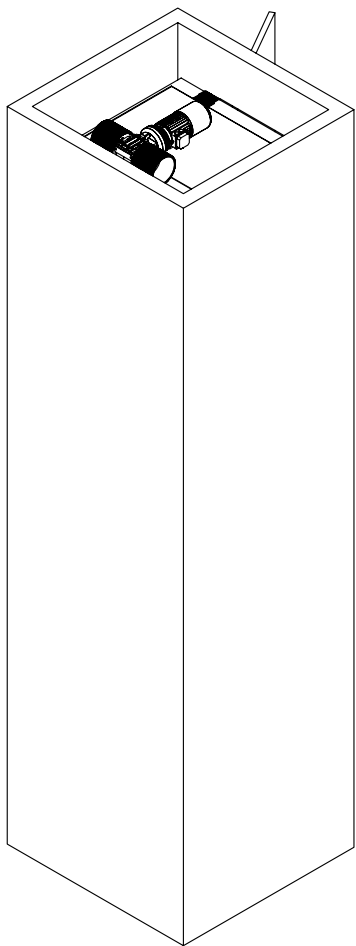
PROVIDE WALL CONSTRUCTION
SUITABLE FOR ATTACHMENT OF
RAIL BRACKETS AT SHOWN ELEVATION.
MUST BE CAPABLE OF 300LB PULLOUT
LOADING WITH MAX DEFLECTION OF 1/8".

BRACKET LOCATIONS MAY VARY
ACCORDING TO TRAVEL

SPREADER BRACKETS
FASTEN WITH LAG SCREWS
2 PLACES PER SIDE BRACKET

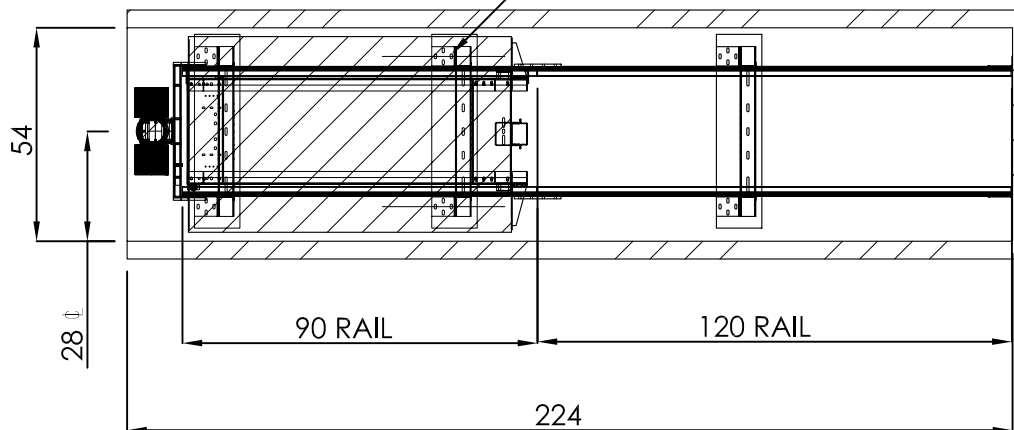

SIZE	 www.elevators.com P: 888-695-4387 E: info@elevators.com
A	
PART NO.	36 X 48, TYPE 5L
DESCRIPTION:	SWING DOORS, OVERHEAD DRUM



SIZE	 www.elevators.com P: 888-695-4387 E: info@elevators.com
A	
PART NO.	36 X 48, TYPE 5L
	SHEET 3 OF 3
DESCRIPTION:	SWING DOORS, OVERHEAD DRUM