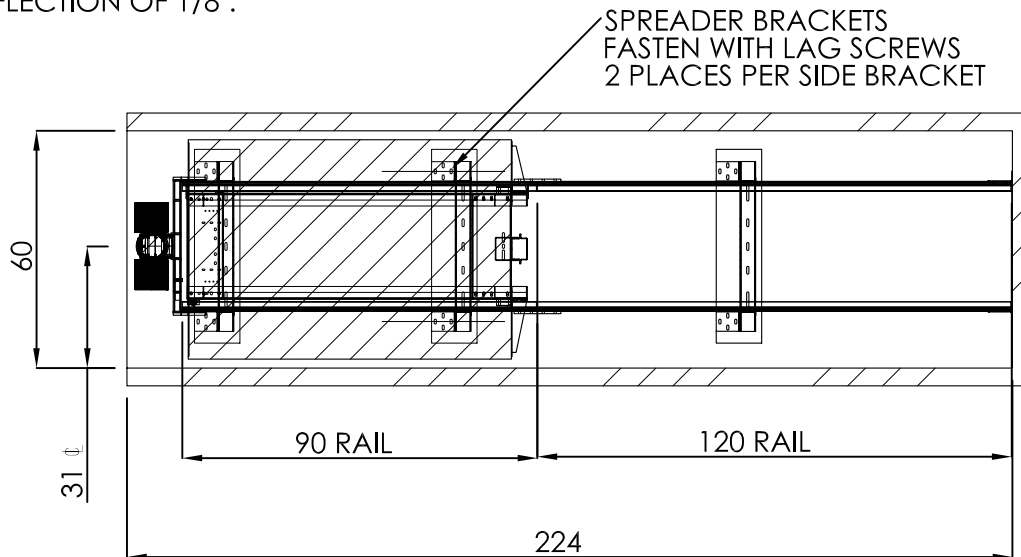

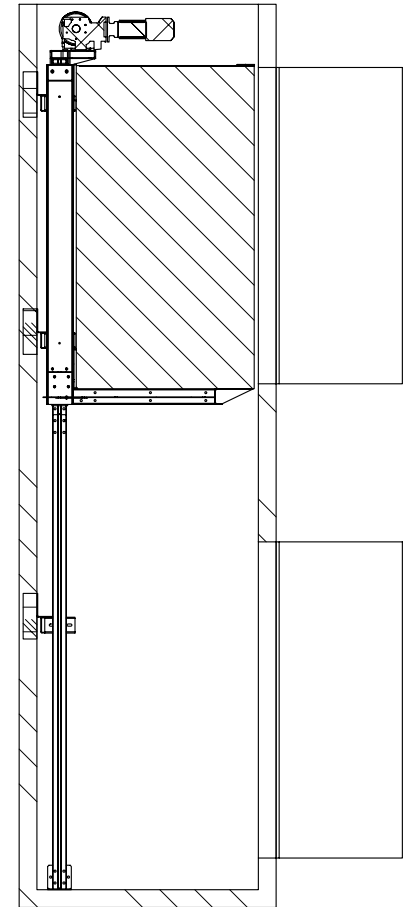
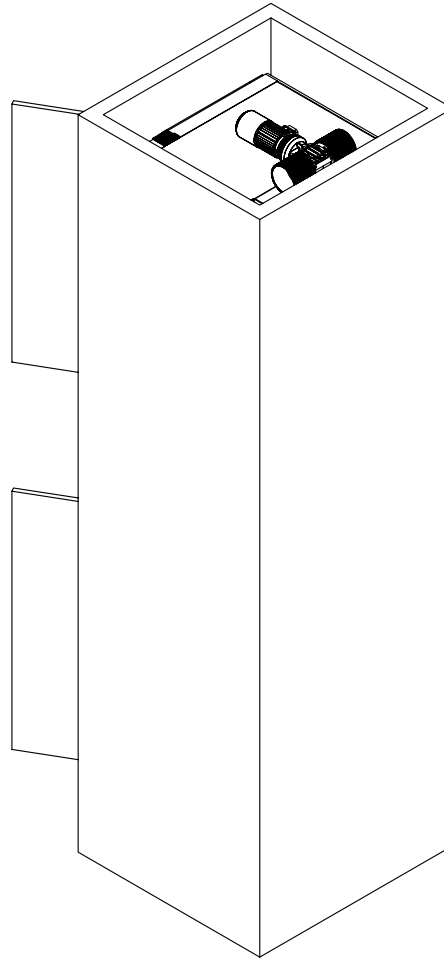
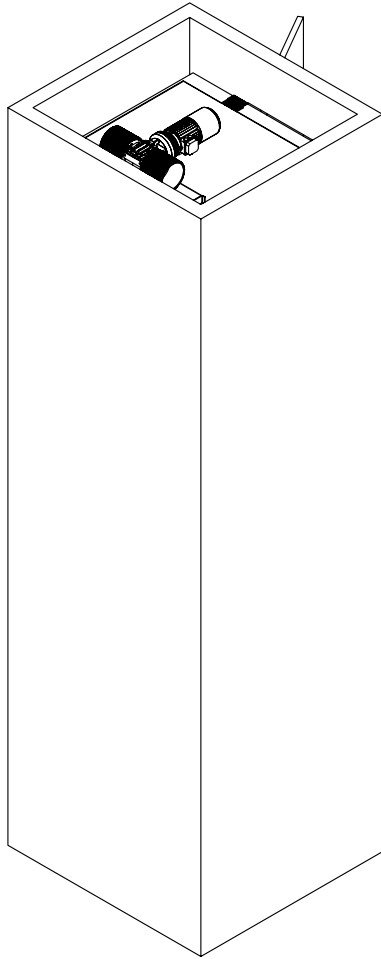


PROVIDE WALL CONSTRUCTION  
SUITABLE FOR ATTACHMENT OF  
RAIL BRACKETS AT SHOWN ELEVATION.  
MUST BE CAPABLE OF 300LB PULLOUT  
LOADING WITH MAX DEFLECTION OF 1/8".

BRACKET LOCATIONS MAY VARY  
ACCORDING TO TRAVEL



SIZE	 <a href="http://www.elevators.com">www.elevators.com</a> P: 888-695-4387    E: info@elevators.com	
<b>A</b>		
PART NO.	<b>40 X 54, TYPE 5L</b>	
DESCRIPTION:	SWING DOORS, OVERHEAD DRUM	



SIZE	 <b>Nationwide Lifts</b> www.elevators.com
<b>A</b>	
PART NO.	
<b>40 X 54, TYPE 5L</b>	
SHEET 3 OF 3	
DESCRIPTION:	
SWING DOORS, OVERHEAD DRUM	