
ATTIC ATTIC 12"t 12"t 1 2ND FLOOR INTERMEDIATE GROUND FLOOR GROUND FLOOR


VIEW "A-A" SCALE 2:1 6 MAX. OPENING OF DOOR 90 DEGRESS

OPTION: REMOTE LOCATION OF HEAD UNIT

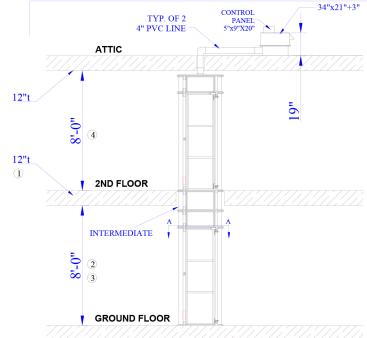

NOTE:

- (1) INTERMEDIATE CYLINDER IS CUSTOM MADE AS FLOOR THICKNESS MAY VARY FROM HOME TO HOME.
- (2) INTERMEDIATE CYLINDER IS CUSTOM MADE AS ROOM HEIGHT MAY VARY FROM HOME TO HOME.
- (3) MINIMUM ALLOWABLE HEIGHT IS 7'-9"
- (4) MINIMUM ALLOWABLE HEIGHT AS SHOWN FOR THIS TYPE OF INSTALLATION
- (§) INTERNAL DIAMETER OF CABIN WITHOUT THE COLUMNS IS 32" AND THE INTERNAL CABIN HEIGHT IS 6'-5"
- (6) DOOR WIDTH IS 23 1/2"
- 7 MAX. ELEVATOR HEIGHT IS 35'

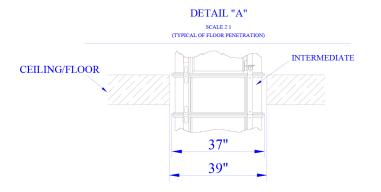

Information contain herein is the property of Pneumatic Vacuum Elevators LLC. No reproduction or disclosure of this information may be made by the recipient to any person or organization without the written consent of Pneumatic Vacuum Elevators LLC.

Itemref.	Quantity	Material	Dimentions		Article I	Article No./ Reference		
				TYPICAL HOME INSTALLATION FOR A 2STOP ELEVATOR				
			Designed by HS	Scale 1:1	Drawing No. D-TYP-H-01	Rev 1	Date 07/22/11	